

User Manual for "SOLARMAN Smart" APP (for End User)

1. APP Download



Go to "**Google Play**"(Android Phone) or "**App Store**"(iPhone) and search "**SOLARMAN Smart**".



2. Registration

Go to "**SOLARMAN Smart**" and register.



Click "**Register**" and create your account here.

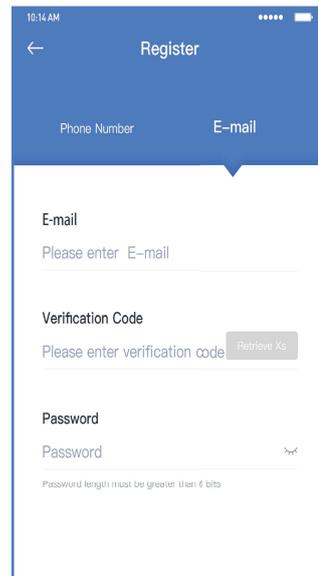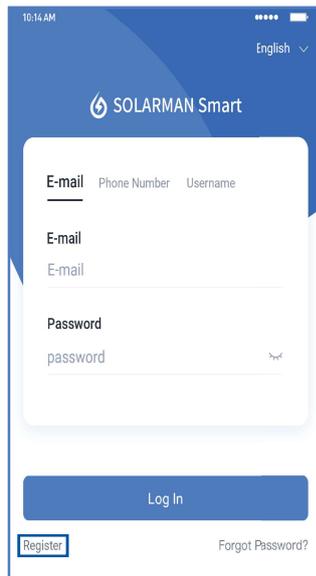

3. Create a Plant

Step 1) Click "Add Now" to create your plant.

Step 2) Please fill required info for the plant.

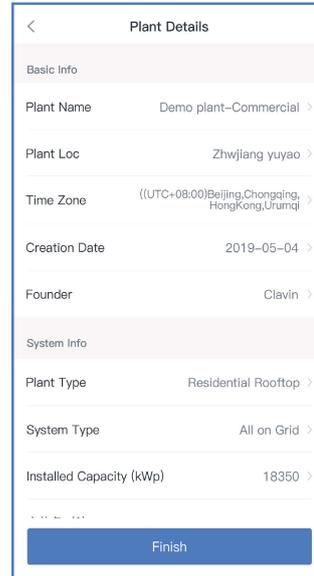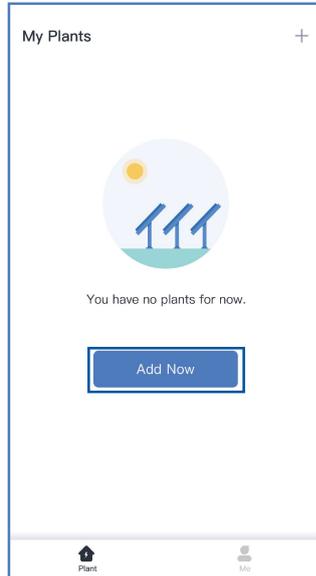



4. Add a Data Logger

Option 1) Click "[-]" and scan the QR code of data logger.

Option 2) Click "+" and select "Add a Device".


Notice:

You can find logger SN in the external packaging or on the logger body.

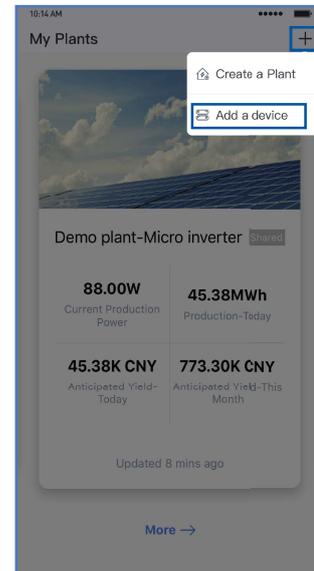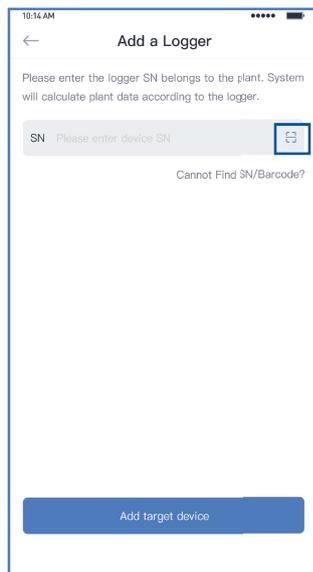


5. Network Configuration

Go to "Plant Details" - "Device List" and find the target SN and click "Networking".

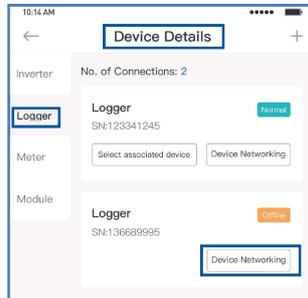

Step 1) Confirm Wi-Fi Info

Please make sure your phone has connected to the right WiFi network. And click "Start to configure".

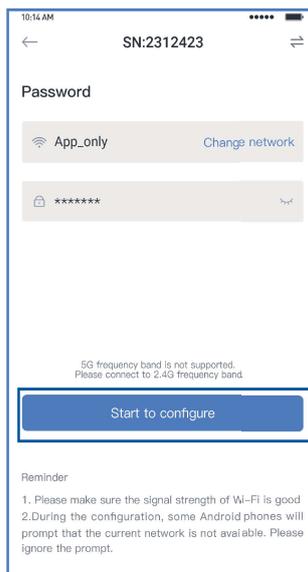



Notice:

5G Wi-Fi is not supported.

Step 2) Connect to AP network

Click **"Go to connect"** and find the right **"AP_XXXXX"** network (XXXXX refers to logger SN).

Go back to **"SOLARMAN Smart APP"**, after connecting to AP network.

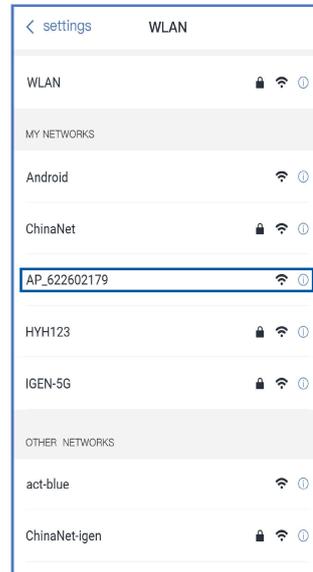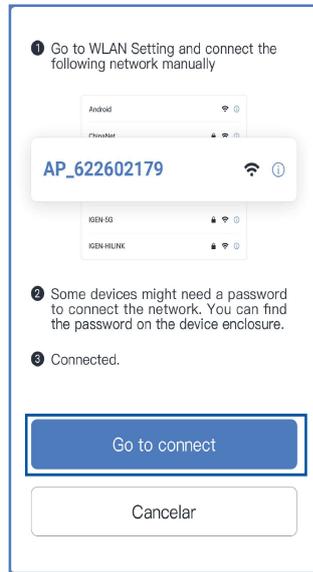



Notice:

If the password is required, you can find the password on the logger body.

Step 3) Auto Configuration

Please wait for a while to complete the configuration. Then system will switch to the following page.

Click "**Done**" to check plant data(Usually, the data will be updated in 10 mins).

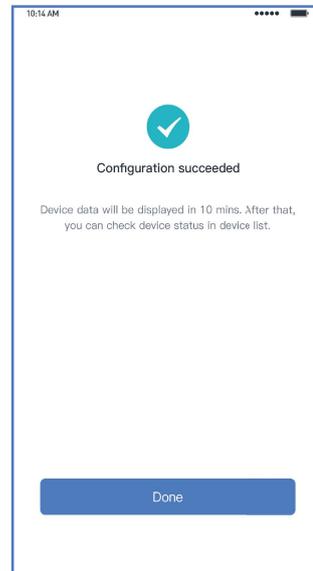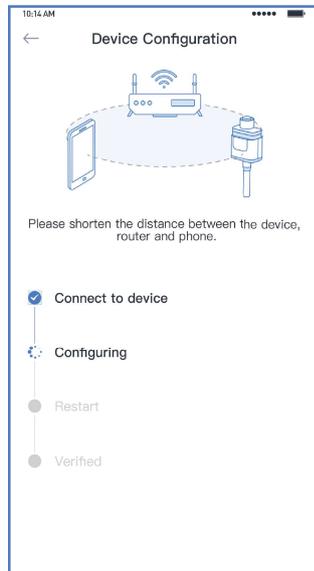

If configuration fails, please check the following reason and try it again.

- 1) Make sure WLAN is ON.
- 2) Make sure WiFi is normal.
- 3) Make sure wireless router does not implement the white-black list.
- 4) Remove the special characters in Wi-Fi network.
- 5) Shorten the distance between the phone and device.
- 6) Try to connect to other Wi-Fi.